

TEHNIČKE INFORMACIJE pre-fill Standard doza



ColorMatic prethodno punjene boje u spreju su pred-punjene sa pokretačima i posebnim aditivima, a zatim VitoMat strojevima za punjenje sa željenim premazom. Inovativna tehnologija spreja i ventila omogućuju široko raspršivanje, a visoka stopa uporabe i stalan tlak daju najbolje krajnje rezultate i kvalitetu izrade. ColorMatic standard za prethodno punjenje je prethodno punjena limenka sa pokretačkim plinovima i otapalom te se može napuniti sa temeljnim slojem na bazi otapala. Uporaba: idealan za manje popravke i završne dijelove.

KVALITETA I SVOJSTVA

- Limenka sa predpunjenjem plinom i otapalima. Boja se preko uređaja dodaje u limenku i na taj način se proizvodi proizvod koji je spreman za upotrebu. A spray can pre-filled with propellant and solvents. The paint is transferred via a filling device into the can to produce a ready-to-use end product (odgovornost trgovaca)
- Jednostavna aplikacija koja štedi vrijeme
- Izvrsno raspršivanje
- Blago miješanje

Physical and chemical data

- **Colour:** depending on filling
- **Smell:** solvent
- **Efficiency:** Depending on consistence and colour of the ground
- **Substrate:** Depending on the colour of the substrate apply Primer Filler HG1 - HG8, 2K Primer Filler no. 195 327, 1K Primer for ALU no. 190 278, 1K Primer for Zinc no. 190 285, 1K Epoxy Primer no. 174 414, 1K Filler, beige no. 856 556, ColorMatic 1K Filler, grey no. 874 987, cured paint sanded
- **Drying time (at 20°C, 50% relative air humidity):** The drying time depends on surrounding temperature, air humidity, thickness of the applied coat and the filled type of paint (refer to information of the paint manufacturer)
- **Storage stability:** empty cans: 5 years
Filled cans: depending on type of paint from several hours up to 6 month (information from your specialist dealer). If appropriate storage provided (=10°-25°C, relative air humidity max. 60%)
- **Size:** Aerosol cans, maximum nominal volume 400 ml and 150 ml, filling quantity 100ml for no. 570704, filling quantity for 150ml can 37ml, no. M570707
- **VOC-value:** 218g


Okoliš i označavanje

Ekološki prihvatljivo: European Aerosols proizvodi su u potpunosti (100%) bez teških metala. Kape i ambalaža su izrađene od recikliranog materijala.

Odlaganje: Reciklirati i odlagati u za to predviđene spremnike samo u potpunosti prazne limenke. Limenke koje nisu prazne trebaju se zbrinuti kao "poseban otpad".

Obilježavanje/označavanje: Svi proizvodi proizvedeni u European Aerosols u skladu su sa propisima o označavanju prema direktivi 1999/45 / EG. Svi aerosoli odgovaraju TRGS 200 i TRG300 kao i aerosol direktivi 75/324/EWG u važećoj verziji.

- Clean the surface to be painted thoroughly with ColorMatic silicone cleaner no. 174 469, then sand
- Larger bare surfaces must be pre-primed with the appropriate ColorMatic primer
- The area must be dry and free of dust and grease
- Shake can vigorously for 2 minutes
- Carry out spray test
- Compatibility testing is necessary
- **For professional use only**
- **Wear an appropriate respirator (recommended type A2/P3)**

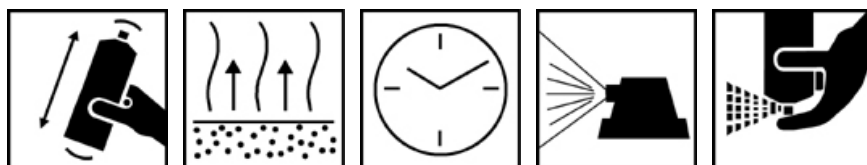

*Pay attention to manufacturer's instruction/ Angaben des Lackherstellers beachten

This release replaces all eventually earlier issued versions

Datum ispisa: 17.04.2024